
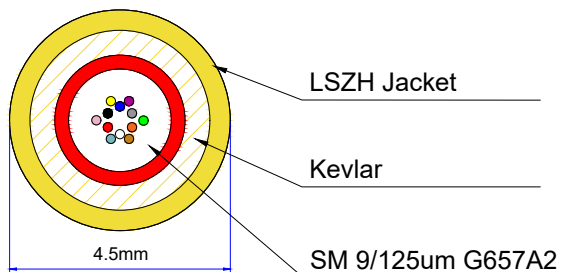


REV.	ECN.	NO.	APPD.
A			

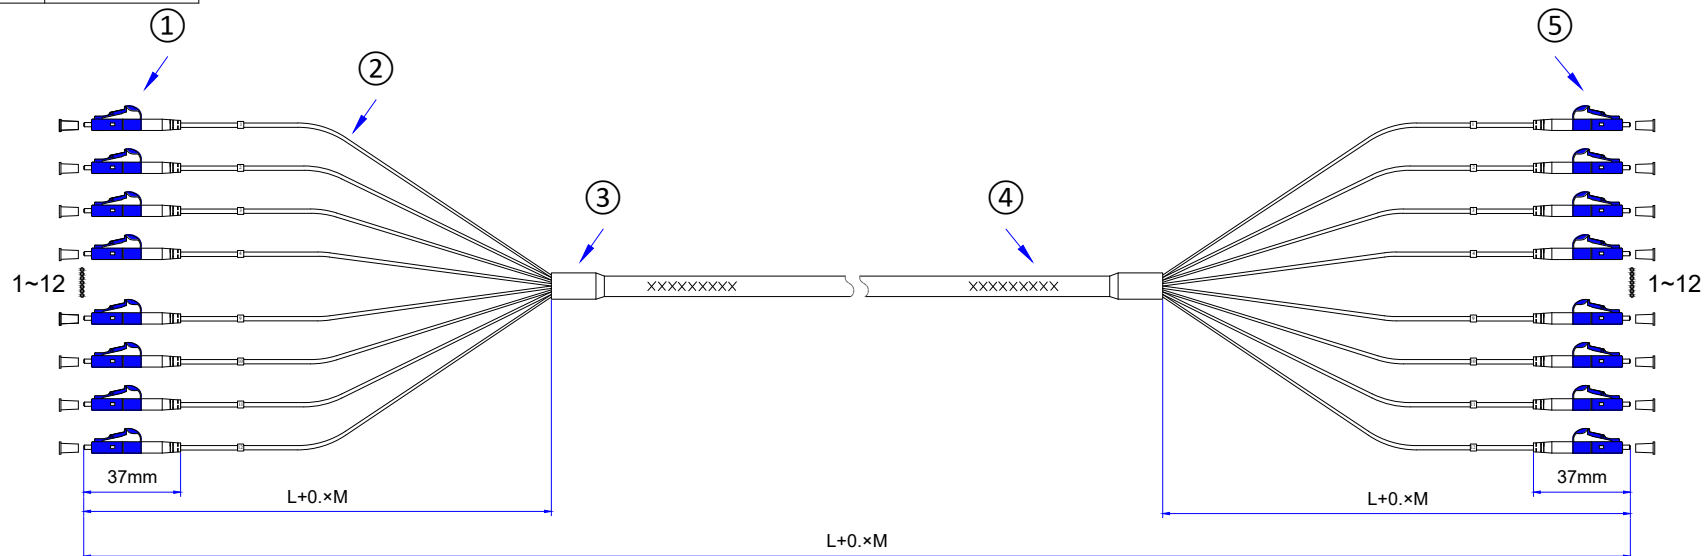

NOTE:

- 1 cable print: company standard
- 2 IL: 1310nm/1550nm: $\leq 0.2\text{dB}$
RL: 1310nm/1550nm: $\geq 55\text{dB UPC}$
 $\geq 65\text{dB APC}$
- 3 3D test : 80% pass IEC 61755-3-2
Radius : 5~12mm/7~25mm
Apex offset: 0~70 μm
Fiber height: $\pm 100\text{nm}$
Angle : $8^\circ \pm 0.3$
- 4 End face : IEC 61300-3-35
- 5 operation temperature: $-40^\circ\text{C} \sim +85^\circ\text{C}$
- 6 1 PCS / plastic zip bag

07	0	0	PCS
06	0	0	PCS
05	LC 2.0mm SX Blue conn short boot	12	PCS
04	LSZH 4.5mm Yellow cable	/	M
03	Fanout kit L:5cm	2	PCS
02	LSZH 2.0mm Yellow cable tube	/	M
01	LC 2.0mm SX Blue conn short boot	12	PCS
NO.	DESCRIPTION	Q'TY	UNIT

NAME<INTENDED USE>	PHOEBE			
MANUFACTURE				
PART NO.<INTENDED USE>	TITLE: LC UPC(SB)-LC UPC(SB) 12FO SM SX 4.5 LSZH G657A2			
NO				
APPD:	DWG NO:			
CHKD: YANG	XK-250507-001			
DR: YU				
		SCALE	SHEET	REV.
		1:1	1/1	A